

WM MOBILE

MOBILE LOADING RAMP. THE RAMP FOLDS INTO 2 SO IT CAN BE EASILY TRANSPORTED, AND IT FEATURES REST-ON TYPE DESIGN SO IT DOES NOT REQUIRE ANY INSTALLATION OPERATIONS.

LOAD CAPACITY: UP TO 300 KG



Aluminium anti-slip platform



Adjustable floor contact flap



Safety edges (5 cm)



Four wheels and two handles for easy transport




LOAD CAPACITY
300 kg

CUSTOMISED DIMENSIONS
Width from 30 to 100 cm
Length from 150 to 325 cm

HANDLING
Mobile

COLOUR
Green

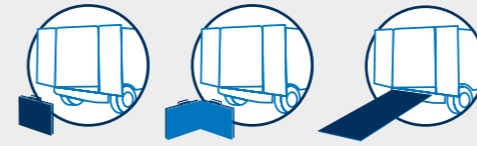

REMOVABILITY AND TRANSPORT

Mobile ramp without installation requirements: simply rests on the van floor. The special rest-on system is adjustable and features 4 alternative positions for perfect adaptation to different vehicle heights.

OPTIONAL EXTRAS



ANODISED PLATFORM

For enhanced durability and aesthetics, the aluminium ramp can be supplied with an anodised surface treatment.



ONE-PIECE RAMP

The central hinges can be locked to obtain a non-folding one-piece ramp.

APPLICATION SECTORS



GENERAL CLEANING



ELECTRICIANS
PLUMBING
AND HEATING
ENGINEERS



MOTORBIKES
BICYCLES



EVENTS
CONCERTS

EXAMPLE MODELS	A (mm)	L (mm)	L1 (mm)	L2 (mm)	H (mm)	P (mm)	P2 (mm)	Capac. (kg)	Weight (kg)
MOBILE 40	1750	536	465	400	905	155	45	300	21
MOBILE 50	2250	636	565	500	1155	155	45	300	29
MOBILE 60	2500	736	665	600	1280	155	45	300	35
MOBILE 65	2750	786	715	650	1405	155	45	300	40
MOBILE 70	3000	836	765	700	1530	155	45	300	45
MOBILE 70	2000	836	765	700	1030	155	45	300	32
MOBILE 75	2500	886	815	750	1280	155	45	300	40
MOBILE 80	2000	936	865	800	1030	155	45	300	28
MOBILE 80*	2500	936	865	800	1280	155	45	300	33
MOBILE 80*	3000	936	865	800	1530	155	45	300	39
MOBILE 80*	3250	936	865	800	1655	155	45	300	53
MOBILE 85	2000	986	915	850	1030	155	45	300	37
MOBILE 90	3000	1036	965	900	1530	155	45	300	54
MOBILE 100	2500	1136	1065	1000	1280	155	45	300	49
MOBILE 100	3000	1136	1065	1000	1530	155	45	300	58

* lightweight version

